

Advanced 55" Ultra HD ViewBoard® Interactive Flat Panel




IFP5550



The ViewBoard® IFP5550 is an 55" 4K (3840 x 2160) interactive flat panel display with an open platform design and excellent collaborative capabilities. ViewBoard®'s user experience is highlighted by its intuitive two-finger Floating Pen and exclusive one-touch to Google Drive/OneDrive Save features, which stand out above all else by placing the board's controls at your fingertips. With open collaboration in mind, ViewBoard® is fit for integration into Google-based environments, offers seamless Windows compatibility, and comes equipped with Mac multi-touch gesture mirroring. Powered by optional Oktopus software, ViewBoard® IFP5550 supports .iwb and .notebook file formats and accesses to 10,000+ ready-to-use lessons on-line. Pairing ViewBoard® IFP5550's 20-point touch display with pre-installed tools, such as vBoard for annotation, ViewBoard® Cast for content sharing, and Zoom conference software, allows multiple users to remotely write, share, and interact simultaneously as if they were in the same room. With its built-in Quad Core processor and internal storage, ViewBoard® IFP5550's computing capabilities are powerful enough to support an array of multimedia applications. The optional slot-in PC with Windows 10 OS offers users specialized annotation software ViewBoard 2.1 for more dynamic interactivity functions. Supporting DisplayPort 4K input, HDMI-out, as well as shared USB and LAN ports for the embedded player and optional PC makes it flexible enough to fit a wide range of user scenarios. Its versatile connectivity provides users with hassle-free connection to a multitude of devices and a VESA-compatible design allows for placement on a wall mount or trolley for flexible installation anywhere, no matter the occasion.

- 3840 x 2160 4K resolution
- 20-point touch capability
- Floating Pen - Annotation on Demand
- Viewboard 2.1 Annotation Software
- Built-in ARM Quad-core CPU with 16GB Storage
- Out-of-Box Collaboration

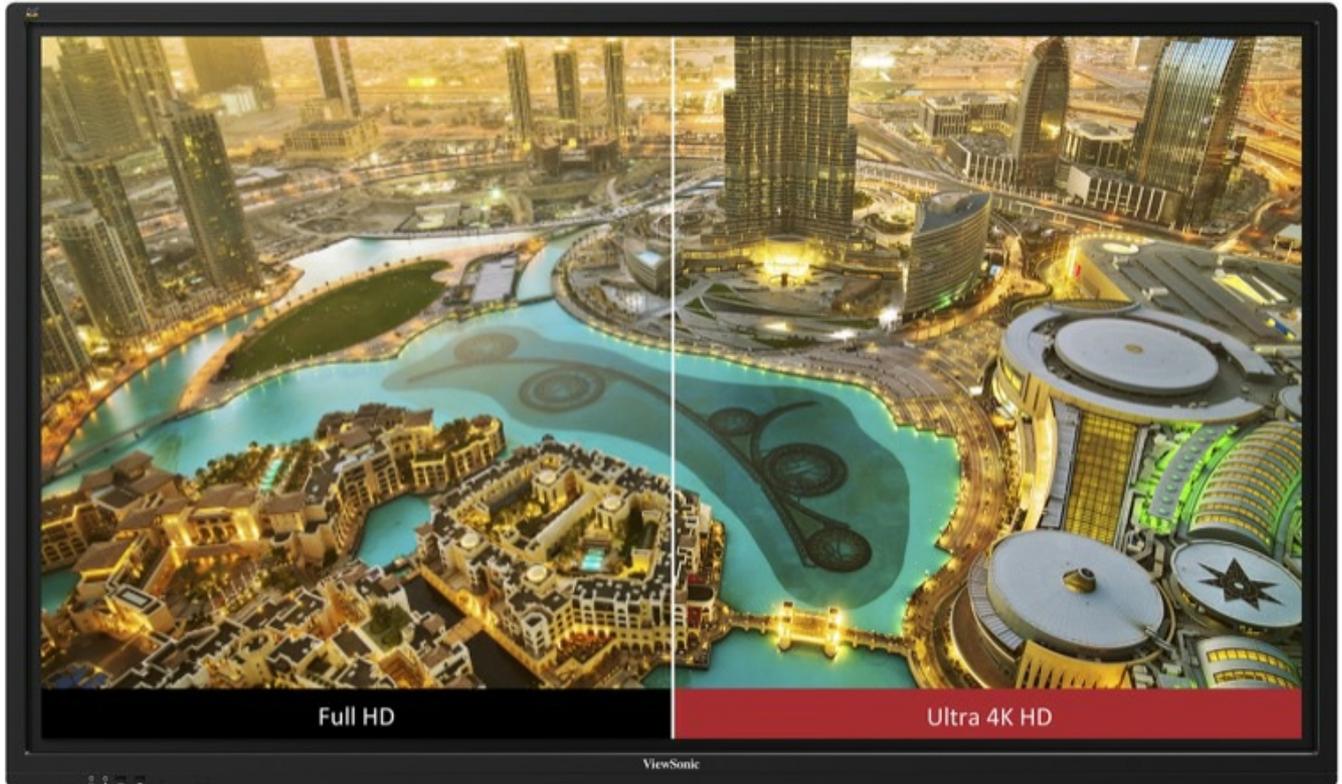

4K Resolution with Eye-Care Technology *4K, Flicker-Free, Blue Light Filter*

With four-times the resolution of Full HD, ViewBoard®'s Ultra HD 3840 x 2160 display delivers breathtaking visuals. 4K DisplayPort input is also supported for external sources. Flicker-Free technology and a Blue Light Filter come standard to help to eliminate eye strain from extended viewing periods.



20-Point Touch *Multi-user annotation*

ViewBoard® allows multiple users to annotate on the slim display simultaneously, increasing engagement and encouraging group collaboration.



Floating Pen *Annotation on demand*

Two-finger touch activates ViewBoard's Floating Pen that allows for easy annotation on everything from powerpoint files, to text docs, USB files, internal memory, or even on images from a connected input source.



ViewBoard 2.1 Annotation Software *Teaching whiteboard*

Viewboard 2.1 is an advanced education-oriented annotation app that includes subject templates, multimedia support, screen recording, and many other effective teaching tools. In Google-based classrooms, multiple users can share and save any of their vBoard 2.2 content with ease.






Built-in ARM Quad-core CPU with 16GB Storage

Equipped with a powerful quad-core processor and Android OS, this display provides smooth, lightning-fast computing and responsive touch capabilities. 16GB of onboard memory provides ample storage for files and multimedia content.



Out-of-Box Collaboration

Integrated with ViewSonic vBoard and Cast software, as well as Zoom[®] software, this display delivers out-of-the-box annotation and content sharing capabilities.

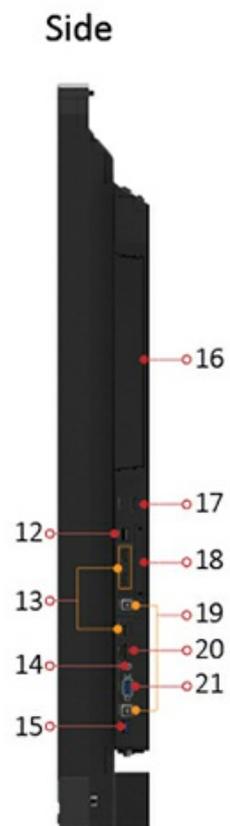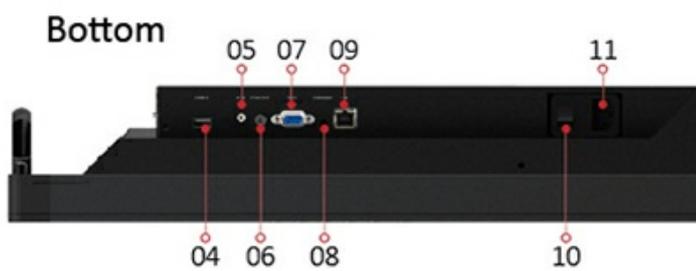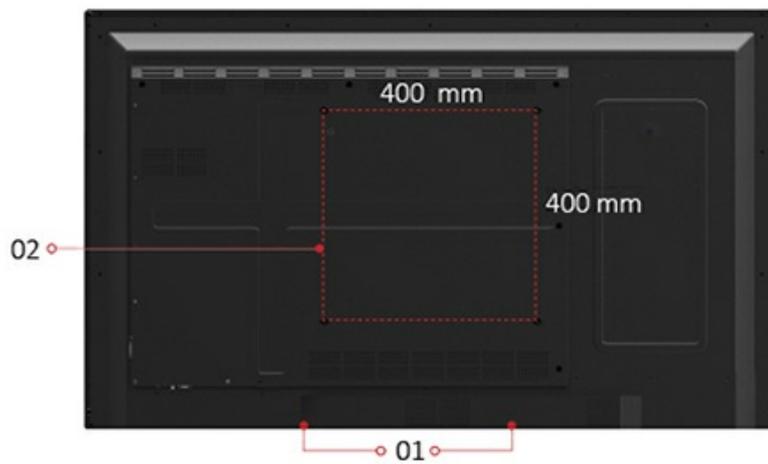

1. SPEAKERS


2. VESA® WALL MOUNT 400x400 mm
3. MENU CONTROLS
4. USB 2.0
5. CVBS IN (AV IN)
6. SPDIF (COAX OUT)
7. RS232 IN
8. AUDIO OUT
9. RJ45 (LAN)
10. POWER ON/OFF
11. AC IN
12. USB 2.0 & 3.0
13. HDMI IN
14. AUDIO IN
15. USB 2.0 & 3.0
16. PC SLOT
17. HDMI OUT
18. WIFI & BLUETOOTH MODULE SLOT
19. USB 2.0(Touch)
20. DisplayPort
21. VGA IN

Learn more about Software



ViewBoard® Cast Content Sharing Software *On-site content sharing software*

ViewBoard® Cast is a content sharing app for mobile devices that enables 1080p content to be streamed from a user's device onto ViewBoard® wirelessly or over a cable network.

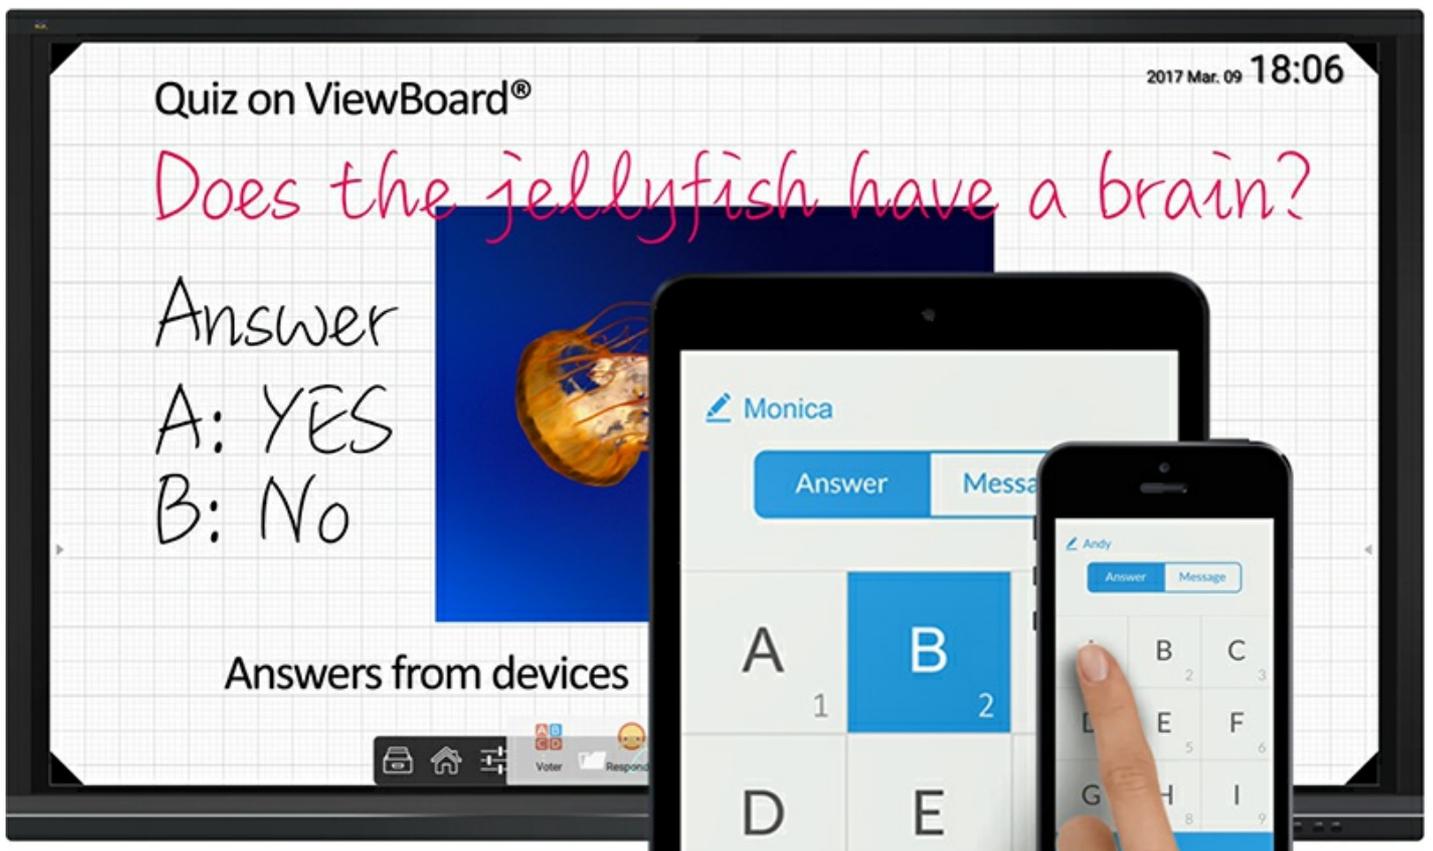


Air ClassQuiz tool

Display quiz questions on ViewBoard® and allow participants to submit answers remotely. Whether deploying a single or multiple choices question, ViewBoard® will record statistic result for each device being used. Pop quizzes can be easily implemented by syncing up ViewBoard® with participants' devices; once synced presenters can choose from multiple choice questions or the text to answer messaging function.



Zoom Conference Software *On-line conference software*

Zoom is a conferencing app that enables content to be streamed from a user's devices onto ViewBoard® over the internet. It supports up to 10 participants, allowing 4 of the 10 to stream content from their laptop or smart phone.

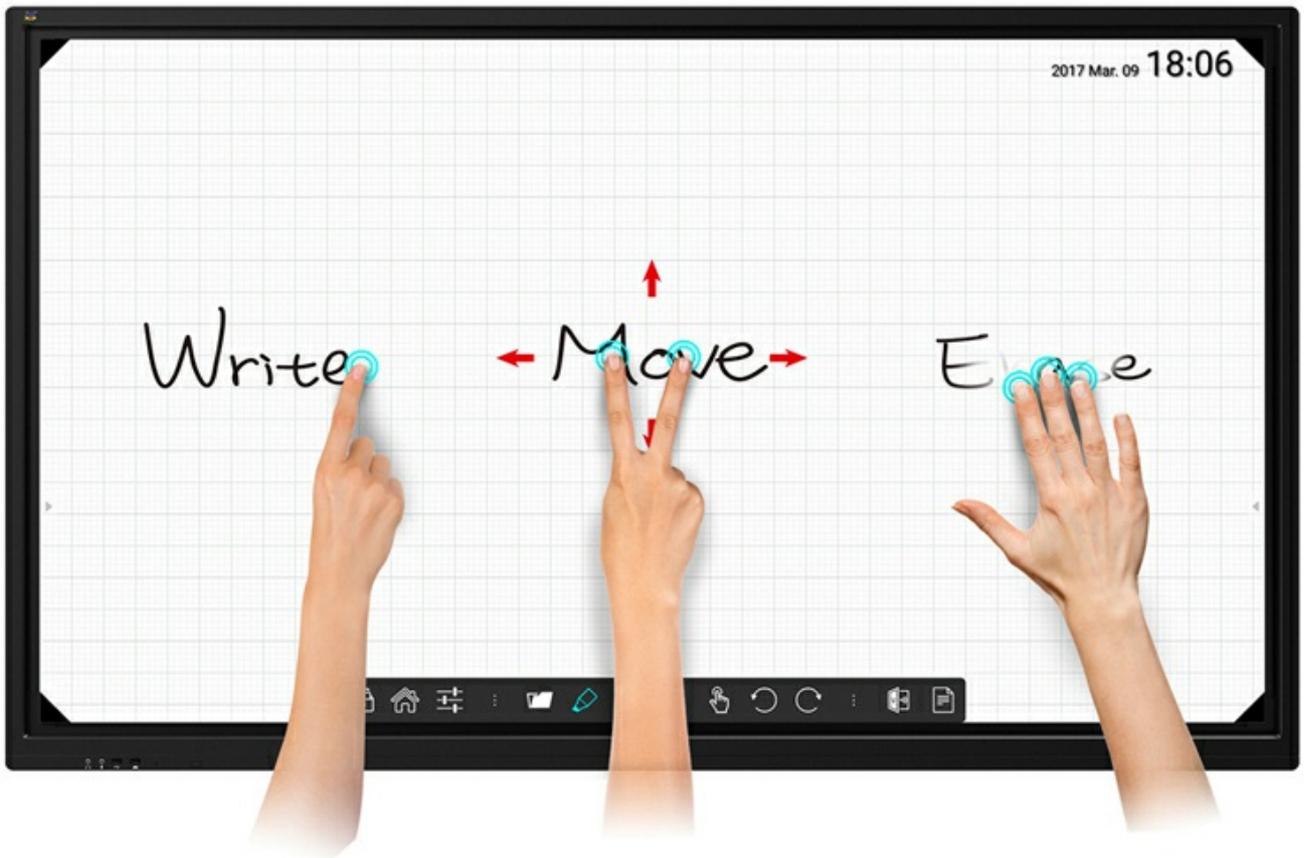

vBoard Annotation Software *Annotation whiteboard*

vBoard is an annotation app used for writing and drawing on the ViewBoard®. The intuitive “draw with one finger, move/zoom with two fingers, and erase with three fingers” design delivers a user friendly experience.



Add-on Tamashare Software

Tamashare is the first software that allows group collaboration in any kind of work organisation.

Learn More Features



Quick Launcher *Startup top 3 commonly used functions*

ViewBoard®'s vBoard, Cast, and Browser shortcuts enable users to write, cast content, and surf the web; 3 of the most commonly used functions during meetings and in class. These easy access desktop icons are displayed as soon as the ViewBoard® is powered on.



Optional Slot-in Wi-Fi & Bluetooth Module

Offering users a complete wireless environment, the optional slot-in wireless module provides a dual band 2.4GHz/5GHz WiFi network, as well as Bluetooth support for flexible usage.



HDMI-Out Mirroring *Extended display*

Mirroring capabilities deliver group discussion and spatial arrangement flexibility by allowing content and sound to be mirrored on to other devices simultaneously.



Anti-Scratch, Anti-Glare Glass Faceplate*Anti-scratch, Anti-glare*

The 7H scratch-resistant and anti-glare screen offers a durable and consistent high-quality touch experience.

Versatile Connectivity

HDMI, USB, and VGA connections provide the versatility to connect to a wide variety of computing and multimedia devices.

Caractéristiques Techniques

LCD PANEL	Panel Size	55"
	Type/ Tech	TFT LCD Module with DLED Backlight
	Display Area (mm)	1209.6 (H) x 680.4 (V) (54.64" diagonal)
	Aspect Ratio	16:09
	Resolution	3840 x 2160
	Colors	1.07B colors (10bit)

Brightness	350 nits (typ.) 300 nits (min.)
Contrast Ratio	1200:1 (typ.)
Response Time	8 ms
Viewing Angles	H = 178, V = 178 (typ.)
Backlight	DLED
Backlight Life	30,000 Hours Min.
Hardness	7H
Type/ Tech	IR Recognition

TOUCH

Touch Resolution	32767 x 32767
Touch Point	20 points touch, 10 points writing
Response Time	<15ms
System	Windows 10 / Windows 8 / Windows 7 / Windows XP / Vista / Linux / Mac / Android / Wince / Chrome
Life Time	80,000hrs

INPUT

HDMI	1.4a x 2 (3840 x 2160@30Hz) 2.0 x 1 (3840 x 2160@60Hz)
RGB / VGA	x 1
DisplayPort	x 1 (3840 x 2160@60Hz)
Audio	x 1 PC audio (3.5mm)
CVBS (AV)	x 1
RS232	x 1
PC Slot	x 1 (proprietary)

OUTPUT

HDMI	x 1 (1080P@60Hz)
Audio (Earphone out)	x 1
SPIDF	x 1

LAN

RJ45	x 1
------	-----

USB

2.0 Type A	x 4 (front x 2, for both embedded player and slot-in PC)
3.0 Type A	x 2 (front x 1, for both embedded player and slot-in PC)
2.0 Type B (For touch)	x 2

SPEAKERS

16W x 2

BUILT-IN PC

Processor	ARM Cortex A53 Quad Core 1.2G Hz CPU
Graphic	ARM Mali-450 Quad Core
Memory	2GB DDR3
Storage	16GB eMMC
Networking	10/100M auto-identification and DHCP

COMPATIBILITY

VGA	Refer to timing table
HDMI	3840x2160

DP	3840x2160
CVBS	480i

POWER	Voltage	100-240VAC +/- 10% Wide Range
	Consumption	250 W

Wall Mount	VESA®	400 x 400mm; Screw: M8 x 25mm
-------------------	-------	-------------------------------

OPERATING CONDITIONS	Temperature (°C)	32°F to 104°F (0°C to 40°C)
	Humidity	10% ~ 90% non-condensing

WEIGHT	Net (kg / lb)	34kg / 74.96lbs
	Gross (kg / lb)	46kg / 101.41lbs

REGULATIONS	Standard	FCC, cTUVus, CE, CB, EAC, BSMI, RCM
--------------------	----------	-------------------------------------

What's in the box?	<ol style="list-style-type: none">1.VGA cable(5 meters)2.Power cable(3 meters) x 43.Remote control4.USB cable(5 meters)5.Audio cable(5 meters)6.AV cable7.Touching pen x 38.User manual CD wizard9.Quick Start Guide10.RS232 adapter11.Clamp x 512.Plate13.Screw x 3
---------------------------	--

Pour en savoir plus, rendez-vous sur : **www.viewsoniceurope.com**

Tous droits réservés par Copyright ViewSonic Corporation. Tous autres noms de sociétés et marques sont propriété de leurs sociétés respectives. E&EO. Les caractéristiques techniques et prix susceptibles de modifications sans préavis. Les images peuvent être utilisées seulement à des fins d'illustration. Pour en savoir plus consulter nos dispositions légales.