

Classis BM 32 / 33 / 34

Boundary Microphones



Classis BM 32 B



Classis BM 33 B



Classis BM 34 SE

FEATURES

- RFI-proof due to Scudio™ technology
- Classis BM 32/34 with half-cardioid polar pattern
- Classis BM 33 with half-spherical polar pattern
- Flat, wide range frequency response
- High-quality reproduction of speech
- Unobtrusive design
- Ceiling or tabletop mounting
- Fast and easy installation

APPLICATIONS

The Classis BM 32 / 33 / 34 condenser boundary microphones have been designed for flush mounting into tabletops or ceilings. The microphones have been designed for applications such as tele/video conferencing, recording or amplification of round table discussions and wherever the microphone needs to be as unobtrusive as possible.

All microphones feature the innovative Scudio™ technology, making the microphones absolutely insensitive to wireless communication devices such as mobile phones.

The Classis BM 32 has a half-cardioid polar pattern, which increases the gain-before-feedback and decreases the amount of diffuse ambience. The Classis BM 34 corresponds to the Classis BM 32, but is provided with a bass roll-off filter. The Classis BM 33 has a half-spherical polar pattern making it ideal for large rooms.

The high sensitivity guarantees a constant output level even from long distance sources.

Elastic bearing rings achieve mechanical isolation from the mounting surface and therefore offer effective sound isolation of the microphone.

SUPPLIED ACCESSORY

- Elastic bearing rings

VERSIONS

Classis BM 32 B	Half-cardioid, black	Order # 489.395
Classis BM 32 W	white	Order # 489.409
Classis BM 32 SE	silver metallic effect, microphone basket made of apuraLine® Topmesh double-layer fine-meshed wire weave.	Order # 489.387
Classis BM 32 E	Half-cardioid, black, without pre-amp, in conjunction with MCS 563 L, MCS 553 L, MCS-D 3643	Order # 721.913
Classis BM 33 B	Half-spherical, black	Order # 489.425
Classis BM 33 W	white	Order # 489.433
Classis BM 33 SE	silver metallic effect, microphone basket made of apuraLine® Topmesh double-layer fine-meshed wire weave.	Order # 489.417
Classis BM 34 B	Half-cardioid, black, bass roll-off filter	Order # 489.360
Classis BM 34 W	white	Order # 489.379
Classis BM 34 SE	silver metallic effect, microphone basket made of apuraLine® Topmesh double-layer fine-meshed wire weave.	Order # 489.352

INSTALLATION

- Mounting hole with elastic bearing rings: Ø 24 mm (15/16")
- Mounting hole without elastic bearing rings: Ø 20 mm (13/16")
- Max. table /ceiling thickness: 57 mm (2.25")

Classis BM 32 / 33 / 34


TECHNICAL SPECIFICATIONS

	Classis BM 32	Classis BM 33	Classis BM 34
Transducer type	Condenser	Condenser	Condenser
Frequency response	50 - 18,000 Hz	50 - 20,000 Hz	150 - 18,000 Hz
Polar pattern	Half-cardioid	Half-spherical	Half-cardioid
Open circuit voltage			
at 1 kHz (0 dB = 1 V/Pa)	19 mV/Pa = -34.4 dBV	15 mV/Pa = -36.5 dBV	19 mV/Pa = -35 dBV
Nominal impedance	< 200 Ω	< 200 Ω	200 Ω
Load impedance	≥ 1 kΩ	≥ 1 kΩ	≥ 1 kΩ
S/N ratio rel. to 1 Pa	69 dB [A]	68 dB [A]	60 dB
Noise voltage	6.0 μV [A]	6.0 μV [A]	
Max. sound pressure level	107 dB [SPL @ 1% THD]	107 dB [SPL @ 1% THD]	
Equivalent SPL	25 dB [A]	26 dB [A]	26 dB
Phantom supply	8 - 52 V	8 - 52 V	8 - 52 V
Current consumption	2.0 mA	2.0 mA	3.4 mA
Connection	3-pin XLR	3-pin XLR	3-pin XLR
Weight (with nut and bearing rings)	approx. 85 g [0.19 lbs]	approx. 85 g [0.19 lbs]	approx. 85 g [0.19 lbs]


WIRING DIAGRAMS

Positive pressure produces positive voltage on pin 2.

Classis BM 32/33/34

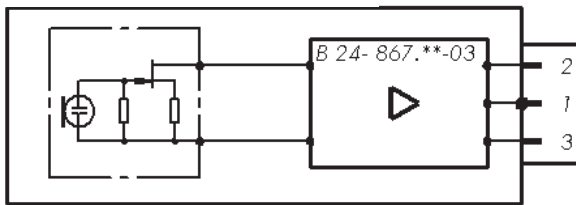


Classis BM 32 E

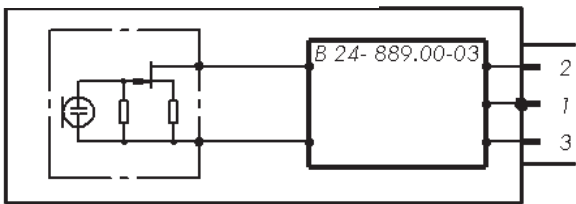


DIMENSIONS

In millimetres (inches in brackets)

Classis BM 32






Classis BM 33



Classis BM 32 / 33 / 34

FREQUENCY RESPONSE & POLAR PATTERN



This frequency response curve (measuring tolerance ± 2.5 dB) and polar pattern correspond to a typical production sample for this microphone.

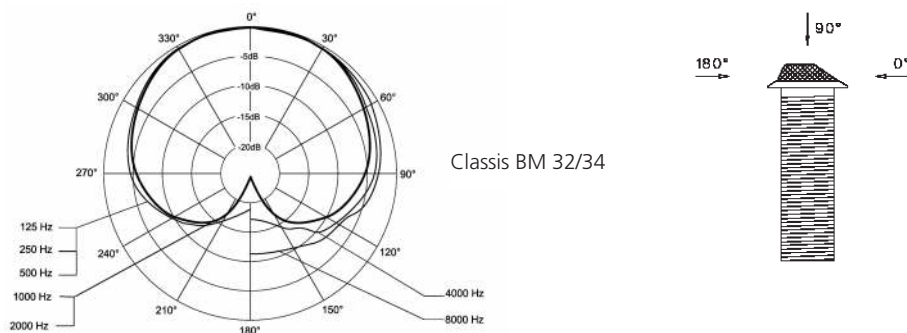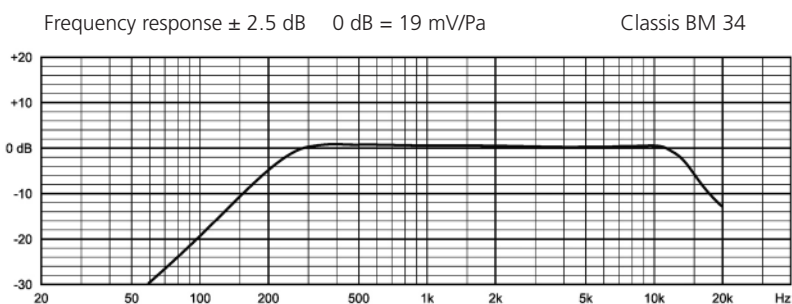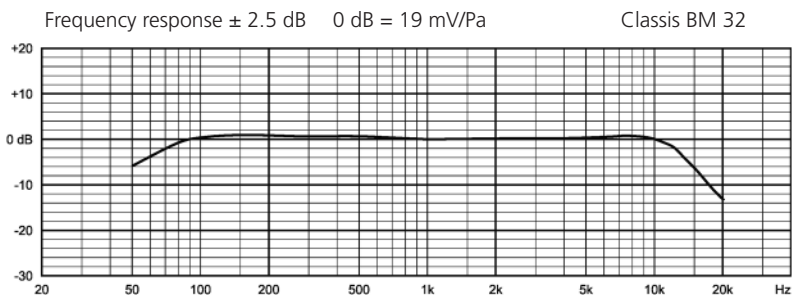

Classis BM 32 / 33 / 34

FREQUENCY RESPONSE & POLAR PATTERN

This frequency response curve (measuring tolerance ± 2.5 dB) and polar pattern correspond to a typical production sample for this microphone.

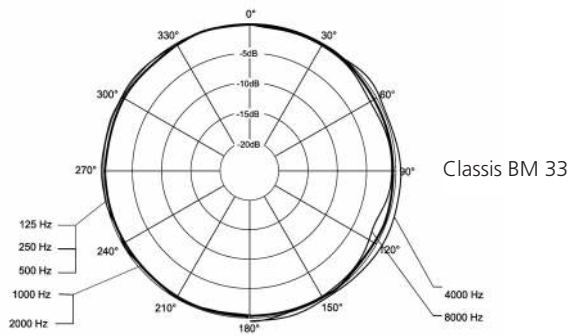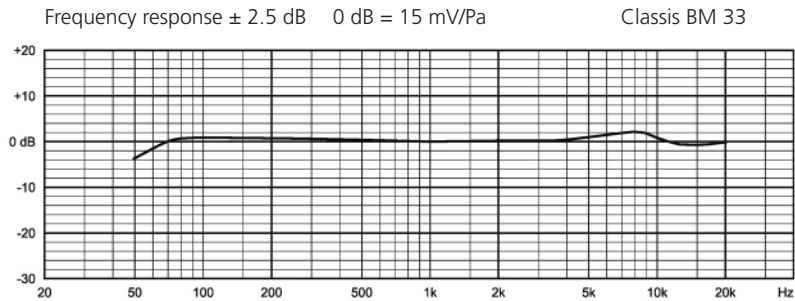

Classis BM 32 / 33 / 34

ARCHITECT'S SPECIFICATIONS

The cardioid electret condenser boundary microphone shall be a high-quality installation microphone for tabletops or ceilings. The microphone shall be provided with an integrated amplifier and power supply. The SCUDIO® technology shall eliminate interferences of other wireless communication devices. The microphone shall be powered by phantom power between 8 V and 52 V. The filter in the microphone grille shall eliminate wind and pop noise. The fully metal housing shall provide a M20 x 1.5 thread with fastening nut and black metal microphone grille. The delivery shall include elastic bearing rings to compensate mechanical noise and vibration. The frequency response shall be 50 Hz - 18 kHz. The open circuit voltage shall be 19 mV/Pa. The nominal impedance shall be 200 ohms. The lower part of the housing shall provide a 3-pin male XLR connector. The total length shall be 76 mm [3"], the shaft length shall be 67 mm [2.6"], the shaft diameter shall be 20 mm [0.8"] (M20 x 1.5 thread with fastening nut), the head diameter shall be 30 mm [1.2"], the length of the head shall be 9 mm [0.4"]. The net weight shall be 0.085 kg [0.2 lbs].

Manufacturer: beyerdynamic
Type: Classis BM 32 B

The cardioid electret condenser boundary microphone shall be a high-quality installation microphone for tabletops or ceilings. The microphone shall be provided with an integrated amplifier and power supply. The SCUDIO® technology shall eliminate interferences of other wireless communication devices. The microphone shall be powered by phantom power between 8 V and 52 V. The filter in the microphone grille shall eliminate wind and pop noise. The fully metal housing shall provide a M20 x 1.5 thread with fastening nut and a microphone grille with silver metal-look made of double-layer, fine-meshed acuraLINE® wire mesh. The delivery shall include elastic bearing rings to compensate mechanical noise and vibration. The frequency response shall be 50 Hz - 18 kHz. The open circuit voltage shall be 19 mV/Pa. The nominal impedance shall be 200 ohms. The lower part of the housing shall provide a 3-pin male XLR connector. The total length shall be 76 mm [3"], the shaft length shall be 67 mm [2.6"], the shaft diameter shall be 20 mm [0.8"] (M20 x 1.5 thread with fastening nut), the head diameter shall be 30 mm [1.2"], the length of the head shall be 9 mm [0.4"]. The net weight shall be 0.085 kg [0.2 lbs].

Manufacturer: beyerdynamic
Type: Classis BM 32 SE

The cardioid electret condenser boundary microphone shall be a high-quality installation microphone for tabletops or ceilings. The microphone shall be provided with an integrated amplifier and power supply. The SCUDIO® technology shall eliminate interferences of other wireless communication devices. The microphone shall be powered by phantom power between 8 V and 52 V. The filter in the microphone grille shall eliminate wind and pop noise. The fully metal housing shall provide a M20 x 1.5 thread with fastening nut and white metal microphone grille. The delivery shall include elastic bearing rings to compensate mechanical noise and vibration. The frequency response shall be 50 Hz - 18 kHz. The open

circuit voltage shall be 19 mV/Pa. The nominal impedance shall be 200 ohms. The lower part of the housing shall provide a 3-pin male XLR connector. The total length shall be 76 mm [3"], the shaft length shall be 67 mm [2.6"], the shaft diameter shall be 20 mm [0.8"] (M20 x 1.5 thread with fastening nut), the head diameter shall be 30 mm [1.2"], the length of the head shall be 9 mm [0.4"]. The net weight shall be 0.085 kg [0.2 lbs].

Manufacturer: beyerdynamic
Type: Classis BM 32 W

The omnidirectional electret condenser boundary microphone shall be a high-quality installation microphone for tabletops or ceilings. The microphone shall be provided with an integrated amplifier and power supply. The SCUDIO® technology shall eliminate interferences of other wireless communication devices. The microphone shall be powered by phantom power between 8 V and 52 V. The filter in the microphone grille shall eliminate wind and pop noise. The fully metal housing shall provide a M20 x 1.5 thread with fastening nut and black metal microphone grille. The delivery shall include elastic bearing rings to compensate mechanical noise and vibration. The frequency response shall be 50 Hz - 18 kHz. The open circuit voltage shall be 15 mV/Pa. The nominal impedance shall be 200 ohms. The lower part of the housing shall provide a 3-pin male XLR connector. The total length shall be 76 mm [3"], the shaft length shall be 67 mm [2.6"], the shaft diameter shall be 20 mm [0.8"] (M20 x 1.5 thread with fastening nut), the head diameter shall be 30 mm [1.2"], the length of the head shall be 9 mm [0.4"]. The net weight shall be 0.085 kg [0.2 lbs].

Manufacturer: beyerdynamic
Type: Classis BM 33 B

The omnidirectional electret condenser boundary microphone shall be a high-quality installation microphone for tabletops or ceilings. The microphone shall be provided with an integrated amplifier and power supply. The SCUDIO® technology shall eliminate interferences of other wireless communication devices. The microphone shall be powered by phantom power between 8 V and 52 V. The filter in the microphone grille shall eliminate wind and pop noise. The fully metal housing shall provide a M20 x 1.5 thread with fastening nut and a microphone grille with silver metal-look made of double-layer, fine-meshed acuraLINE® wire mesh. The delivery shall include elastic bearing rings to compensate mechanical noise and vibration. The frequency response shall be 50 Hz - 18 kHz. The open circuit voltage shall be 15 mV/Pa. The nominal impedance shall be 200 ohms. The lower part of the housing shall provide a 3-pin male XLR connector. The total length shall be 76 mm [3"], the shaft length shall be 67 mm [2.6"], the shaft diameter shall be 20 mm [0.8"] (M20 x 1.5 thread with fastening nut), the head diameter shall be 30 mm [1.2"], the length of the head shall be 9 mm [0.4"]. The net weight shall be 0.085 kg [0.2 lbs].

Manufacturer: beyerdynamic
Type: Classis BM 33 SE

Classis BM 32 / 33 / 34

ARCHITECT'S SPECIFICATIONS

The omnidirectional electret condenser boundary microphone shall be a high-quality installation microphone for tabletops or ceilings. The microphone shall be provided with an integrated amplifier and power supply. The SCUDIO® technology shall eliminate interferences of other wireless communication devices. The microphone shall be powered by phantom power between 8 V and 52 V. The filter in the microphone grille shall eliminate wind and pop noise. The fully metal housing shall provide a M20 x 1.5 thread with fastening nut and white metal microphone grille. The delivery shall include elastic bearing rings to compensate mechanical noise and vibration. The frequency response shall be 50 Hz - 18 kHz. The open circuit voltage shall be 15 mV/Pa. The nominal impedance shall be 200 ohms. The lower part of the housing shall provide a 3-pin male XLR connector. The total length shall be 76 mm [3"], the shaft length shall be 67 mm [2.6"], the shaft diameter shall be 20 mm [0.8"] (M20 x 1.5 thread with fastening nut), the head diameter shall be 30 mm [1.2"], the length of the head shall be 9 mm [0.4"]. The net weight shall be 0.085 kg [0.2 lbs].

Manufacturer: beyerdynamic
Type: Classis BM 33 W

The cardioid electret condenser boundary microphone shall be a high-quality installation microphone for tabletops or ceilings. The microphone shall be provided with an integrated amplifier and power supply with bass roll-off filter. The SCUDIO® technology shall eliminate interferences of other wireless communication devices. The microphone shall be powered by phantom power between 8 V and 52 V. The filter in the microphone grille shall eliminate wind and pop noise. The fully metal housing shall provide a M20 x 1.5 thread with fastening nut and black metal microphone grille. The delivery shall include elastic bearing rings to compensate mechanical noise and vibration. The frequency response shall be 50 Hz - 18 kHz. The open circuit voltage shall be 19 mV/Pa. The nominal impedance shall be 200 ohms. The lower part of the housing shall provide a 3-pin male XLR connector. The total length shall be 76 mm [3"], the shaft length shall be 67 mm [2.6"], the shaft diameter shall be 20 mm [0.8"] (M20 x 1.5 thread with fastening nut), the head diameter shall be 30 mm [1.2"], the length of the head shall be 9 mm [0.4"]. The net weight shall be 0.085 kg [0.2 lbs].

Manufacturer: beyerdynamic
Type: Classis BM 34 B

The cardioid electret condenser boundary microphone shall be a high-quality installation microphone for tabletops or ceilings. The microphone shall be provided with an integrated amplifier and power supply with bass roll-off filter. The SCUDIO® technology shall eliminate interferences of other wireless communication devices. The microphone shall be powered by phantom power between 8 V and 52 V. The filter in the microphone grille shall eliminate wind and pop noise. The fully metal housing shall provide a M20 x 1.5 thread with fastening nut and a microphone grille with silver metal-look made of double-layer, fine-meshed acuraLINE® wire mesh. The delivery shall include elastic bearing rings to compensate mechanical noise and vibration. The frequency response shall be 50 Hz - 18 kHz. The open circuit voltage shall be 19 mV/Pa. The nominal impedance shall be 200 ohms. The lower part of the housing shall provide a 3-pin male XLR connector. The total length shall be 76 mm [3"], the shaft length shall be 67 mm [2.6"], the shaft diameter shall be 20 mm [0.8"] (M20 x 1.5 thread with fastening nut), the head diameter shall be 30 mm [1.2"], the length of the head shall be 9 mm [0.4"]. The net weight shall be 0.085 kg [0.2 lbs].

Manufacturer: beyerdynamic
Type: Classis BM 34 SE

The cardioid electret condenser boundary microphone shall be a high-quality installation microphone for tabletops or ceilings. The microphone shall be provided with an integrated amplifier and power supply with bass roll-off filter. The SCUDIO® technology shall eliminate interferences of other wireless communication devices. The microphone shall be powered by phantom power between 8 V and 52 V. The filter in the microphone grille shall eliminate wind and pop noise. The fully metal housing shall provide a M20 x 1.5 thread with fastening nut and white metal microphone grille. The delivery shall include elastic bearing rings to compensate mechanical noise and vibration. The frequency response shall be 50 Hz - 18 kHz. The open circuit voltage shall be 19 mV/Pa. The nominal impedance shall be 200 ohms. The lower part of the housing shall provide a 3-pin male XLR connector. The total length shall be 76 mm [3"], the shaft length shall be 67 mm [2.6"], the shaft diameter shall be 20 mm [0.8"] (M20 x 1.5 thread with fastening nut), the head diameter shall be 30 mm [1.2"], the length of the head shall be 9 mm [0.4"]. The net weight shall be 0.085 kg [0.2 lbs].

Manufacturer: beyerdynamic
Type: Classis BM 34 W